

At a glance ...

Lid Size	235x235x23mm
Capacity	: 4 standard outlets (2 double power & 2 data)
Lid Material	: Stainless Steel (Brass to special order)
Lid Rebate	23mm deep
Box Size	: 242x230x110mm (Plus 22mm deep lid)
Recess Size	: 262x250x120mm (For lower steel box only)



FFOB-550 CASSETTE COVER FLOOR BOX

Benefits

Features a 23mm deep lid rebate for thick timber, tile or stone floor finishes. (not suitable for wet areas)

Holds two standard double power outlets and two data/voice plates (max 6 gang each).

The frame has flush Stainless Steel or Brass edges designed to be installed level with the finished floor. The frame has a levelling facility (0mm to 25mm).

The robust cable outlet flap is manufactured in either Stainless Steel or Brass to match the frame.

Installation Features

Outlets are mounted on an angle within the box to minimise dust accumulation and to allow plugs to be inserted and withdrawn with ease.

The lid is reversible to accommodate changes in room layout and is designed to lift out and lay in (not hinged).

Colours

Standard finish is Stainless Steel with Brass also available to special order. (Minimum quantities, manufacturing lead times and extra charges may apply).

*VDE 0634 "Ducting and trunking and their accessories for underfloor electrical installations".

VDE is the Association for Electrical, Electronic and Information Technologies (Germany).

When used in tiled floors, the use of an expansion joint between the floor box frame and tiles is recommended.




Part Number	Description
-------------	-------------

FFOB-550ss	Stainless Steel Flush Floor Box
FFOB-550b	Brass Flush Floor Box

Ammended Catalogue Info Sheet Ref: EC07

Feb 2007

Assembly Diagram Cat No. FFOB 550

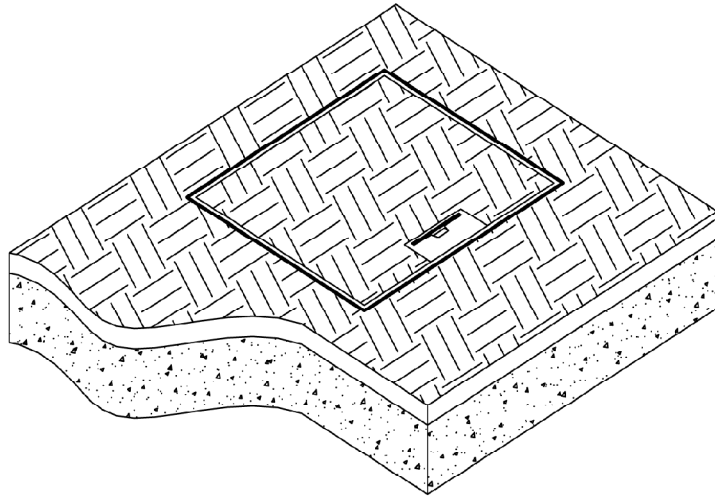

Features:

